




Machine Model: CMH-32 With Button and Screen



Video Link

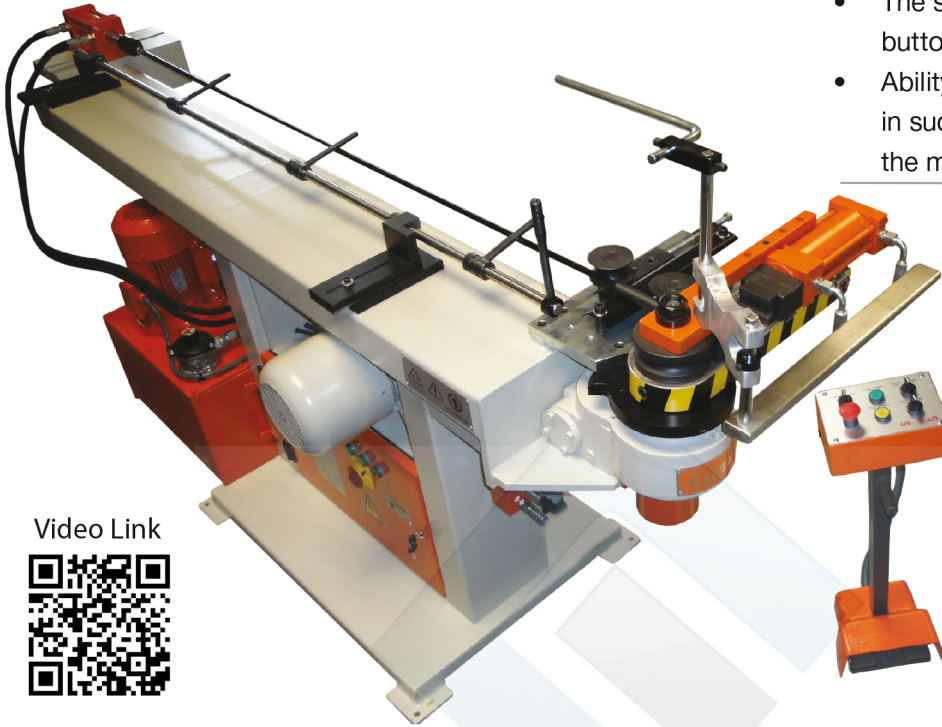

- The specifications of CMH 32 with button plus
- Ability to bend different bending degrees in succession and to record the name of the models on the memory

OR



- Mandrel piston move back and forth after bending. In this way, the pipe can be easily removed from the mandrel.
- Hydraulic clamp prevents pipe to slip, thus you can get better quality of bending.

- 4,3" color touch screen
- Manual or automatic operation on the screen
- Ability to see daily / total amount of production on the screen
- Ability to record 100 different programmes



Safety Plate

Technical Specifications:

- NC system pipe bending machine with gear system
- Maximum bending capacity 32X2 mm diameter
- Hydraulic clamp
- Hydraulic mandrel
- Max. 190 bending angle
- Bending degree with switch
- Electric motor driven
- Precise bending with brake motor
- External brake lining cooling fan
- Manual or automatic operation with the button
- Foot pedal control
- Safety plate with pro-switch
- Mandrel length 2000 mm.
- Max. hydraulic pressure 120 bar
- Total motor power 4.4 kW
- Electrical panel safety lock and panel lock with key
- Two years guarantee; technical service and training confidency by CANSA MAKINA
- Suitable for CE

	
Job Safety Firstly! You can not open the electrical panel before switch of	Electrical panel is suitable for CE
	
Duble oil filters; suction and return; oil pollution indicator	Hydraulic Clamp
	
Strong piston	High quality hydraulic unit